

# QF1200S-CV

## Quaternary Diaphragm Pumps

### Multiple-Use – Biotech/Biopharma

#### Features

- Compact version with integrated controller
- 4-piston technology
- Gentle product treatment
- No particle generation
- Low pulsation
- Linear flow characteristic
- Hygienic design
- Self-priming
- Safe dry-run operation
- Also available as single-use version

#### Applications

- Filtration systems (TFF, etc.)
- Chromatography systems
- Feeding pump
- Virus filtration
- Sterile filtration





#### Technical Data

	QF1200S-CV
<b>Flow Rate Maximum:</b>	
Eccentric Shaft 5°	1200 l/h (317 gph)
<b>Flow Rate Minimum:</b>	
Eccentric Shaft 5°	10 l/h (2.64 gph)
<b>Pressure:</b>	
Temperature of Fluid < 40° C (104° F)	6 bar (87 psi)
Temperature of Fluid > 40° C (104° F)	4 bar (58 psi)
<b>Maximum Temperature:</b>	
Fluid	80° C (176° F)
CIP	90° C (194° F)
SIP	130° C (260° F)
Autoclave	130° C (260° F)
<b>Pump Speed Range:</b>	
rpm	10 - 2200
<b>Suction Lift Dry at 1800 rpm:</b>	
Eccentric Shaft 5°	4 - 4.5 m (13.1-14.7 ft)
<b>Volume Specifications:</b>	
Approximated Volume per Revolution at Free Output	9.6 ml
Filling Volume Without Connectors	75 ml
<b>Connection Specification (Standard):</b>	
Connectors	3/4" TC
Position of Connectors	Inline
Number of Flow Directions	4

	QF1200S-CV
<b>Product Wetted Materials (Standard):</b>	
Pump Chamber	SS316L
Valve Plate	SS316L
Diaphragms	TPE
Valves	EPDM
O-rings	EPDM
<b>Certificates/Proofs (Optional):</b>	
Elastomere (product wetted)	USP <88> Cl. VI; FDA21CFR177; BSE/TSE Safe
Stainless Steel Parts (product wetted)	3.1; Surface Roughness; Ferrite Content
<b>Motor:</b>	
Rated speed	2200 min-1
Voltage	230 V
Power	0.75 kW
<b>Pump Dimension with Motor and Housing:</b>	
Length	487 mm (19.17")
Width	200 mm (7.87")
Height	210 mm (8.27")
<b>Pump Weight with Motor and Housing:</b>	
	25 kg (55 lb.)

## Performance Charts

### Eccentric Shaft: 5°

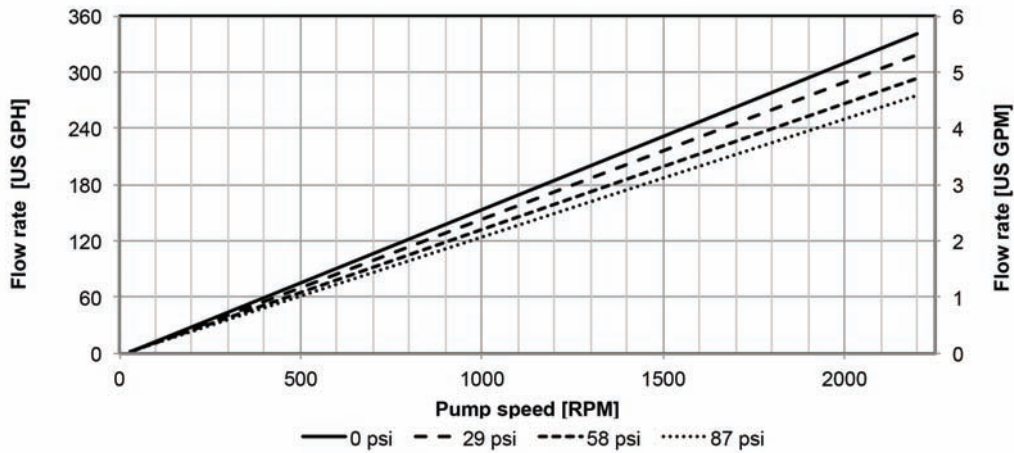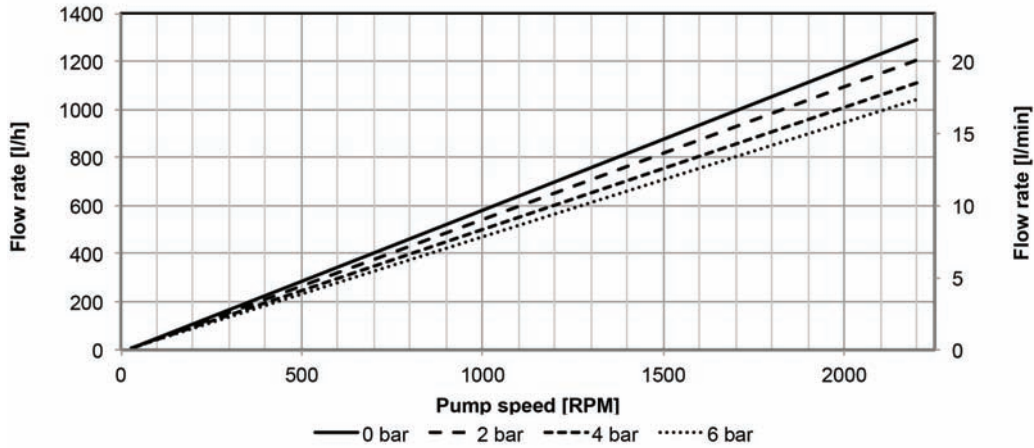

## Accessories



### Power Box

- Plug & Play installation
- Protects system and pump from overpressure
- Configurable pressure switch setpoint
- Reset button for pump reset
- To be used with pressure switch (also available)

### Diaphragm Sensor

- Sensor installed in ring drive unit
- Detection of all liquids
- Signal output to a controller, if diaphragm is ruptured

Distributed by:

### ProcessHQ, Inc.

410 N. Varney Street  
Burbank, CA 91502  
818 861-7641  
info@processHQ.com



PSG Kamp-Lintfort  
ALMATEC Maschinenbau GmbH  
Carl-Friedrich-Gauß-Straße 5  
47475 Kamp-Lintfort - Germany  
0: +49/2842/961-0, F: +49/2842/961-40  
[quattroflow.com](http://quattroflow.com)  
info@almatec.de